




POWER OF SIMPLICITY

Print BOM with Sales Order – 1.0



Alpha Automation Pvt. Ltd.

Head Office

104-The Grand Apurva, Nr. Hotel Fortune Palace,

Nr. Dig jam Circle, Airport Road - JAMNAGAR –Gujarat (India)

Phone No. : +91-288-2713956/57/58, 9023726215/16/17/18, 9099908115, 9825036442

Email : mail@aaplautomation.com

Branch Office

Rajkot : 807-Dhanrajni Complex, Nr. Hotel Imperial Palace, Dr. Yagnik Road, RAJKOT (Gujarat).

Gandhidham : 92-GMA Building, 2nd Floor, Plot No. -297, Sector-12B. GANDHIDHAM (Gujarat)

© 2020 Alpha Automation Pvt. Ltd. All rights reserved.

Tally, Tally 9, Tally9, Tally.ERP, Tally.ERP 9, Shoper, Shoper 9, Shoper POS, Shoper HO, Shoper 9 POS, Shoper 9 HO, TallyDeveloper, Tally.Server 9, Tally Developer, Tally. Developer 9, Tally.NET, Tally Development Environment, TallyPrime, TallyPrimeDeveloper, TallyPrime Server, Tally Extender, Tally Integrator, Tally Integrated Network, Tally Service Partner, TallyAcademy & Power of Simplicity are either registered trademarks or trademarks of Tally Solutions Pvt. Ltd. in India and/or other countries. All other trademarks are properties of their respective owners.

Version: Alpha Automation Pvt. Ltd/ Print BOM with Sales Oder / 1.0/July -2024.

Print BOM with Sales Order – 1.0

Introduction

This add on facilitates user to print BOM (Bill of Materials) details with sales order so user can get details of raw materials required to execute that Order. It also prints Item Stock Qty. in BOM Print. It helps user to plan for the Balance Required Qty.

Benefits

- User can select each Stock Item from Sales Order total List to generate BOM.
- He can also select Item BOM if that item has multiple BOM defined in Item Master. He can also change Item Qty. of Sales Order before Print.

What's New?

- Computable With Tally Prime.

Important!

Take back up of your company data before activating the Add-on.

Once you try/purchase an Add-on, follow the steps below to configure the Add-on and use it.

Installation

1. Copy the TCP file in TallyPrime Folder.
2. Gateway of Tally → F1 (Help) → TDL & Add-on → F4 (Manage Local TDL) → Select Yes in Load TDL on Startup and give the file name of TCP File. After pressing the Enter Key will show TDL Status which should be as Loaded.

System requirements:

No additional hardware / software infrastructure is required for executing and operation this applications module

1. Activate the Add-on.

For Tally Prime Release 1.0

Go to **Gateway of Tally** → **F1: Help** → **TDL & Add-On** → **F6: Add-On Features**.

Alternatively, you may press **CTRL + ALT + T** from any menu to open TDL Management report and then press **F6: Add-On Features**

Set “Yes” to the option “Enable Print BOM from Voucher Entry?”

Add-On Features


Print BOM from Voucher Entry ? **Yes**

Accept ?

Yes or No

**2. Go to Gateway of Tally → Alter → Stock item → Create BOM
→ Create Sales Order voucher of BOM created stock item.**

- Click on button Print BOM report as shown below.

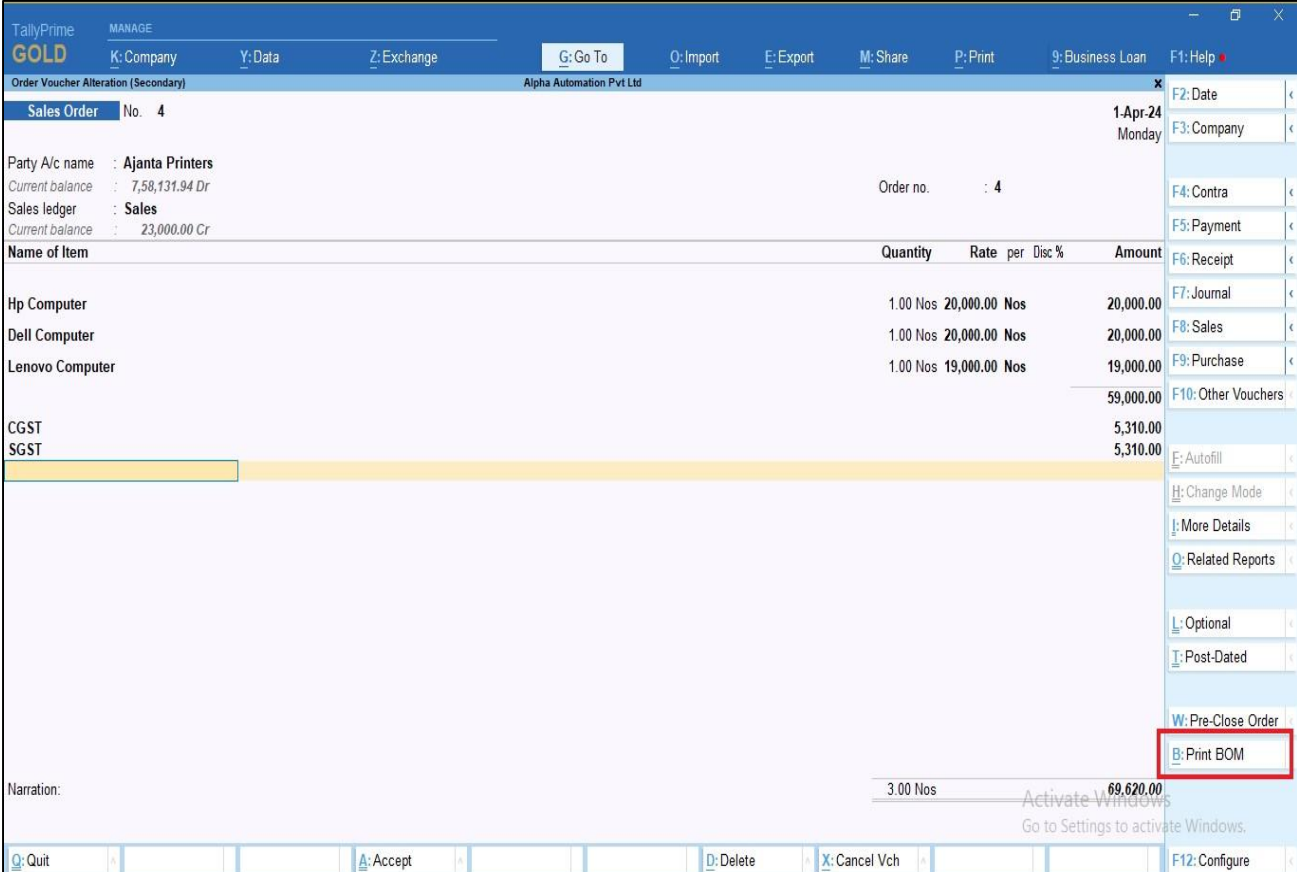

The screenshot displays the TallyPrime interface for a Sales Order voucher. The header shows 'Sales Order No. 4' dated '1-Apr-24 Monday'. The party is 'Ajanta Printers' with a current balance of 7,58,131.94 Dr. The sales ledger is 'Sales' with a current balance of 23,000.00 Cr. The order number is 4.

Name of Item	Quantity	Rate	per	Disc %	Amount
Hp Computer	1.00	Nos	20,000.00	Nos	20,000.00
Dell Computer	1.00	Nos	20,000.00	Nos	20,000.00
Lenovo Computer	1.00	Nos	19,000.00	Nos	19,000.00
					59,000.00
CGST					5,310.00
SGST					5,310.00
					69,620.00

The 'Print BOM' button is highlighted with a red box in the bottom right corner of the voucher screen.

3. Select BOM name as shown below.

::BOM Selection ::			
No.	Finished Goods	BOM Name	Select BOM Name
1	Hp Computer		4 GB RAM
2	Dell Computer		8 GB RAM
3	Lenovo Computer		14.00 NOS

4. Selected BOM details of item is display as shown below.

Party : Ajanta Printers		Date : 1-4-2024
Order No. : 4		
Finish Goods		Qty.
Hp Computer - 4 GB RAM		1.00 Nos
Cpu		1.00 Nos
Mouse		1.00 Nos
Printer		1.00 Nos
Keyboard		1.00 Nos
Monitor		1.00 Nos
64GB Hard Disc		1.00 Nos
Dell Computer - 4 GB RAM		1.00 Nos
Cpu		1.00 Nos
Mouse		1.00 Nos
Printer		1.00 Nos
Keyboard		1.00 Nos
Monitor		1.00 Nos
64GB Hard Disc		1.00 Nos
Lenovo Computer - 8 GB RAM		1.00 Nos
Monitor		1.00 Nos
Cpu		1.00 Nos
Keyboard		1.00 Nos
Printer		1.00 Nos
Mouse		1.00 Nos
Total		3.00 Nos

5. Click on f12 – Configure button to know more details of BOM → set yes to option as per your requirement

:: Configure ::

Change Qty ? **Yes**

Modify Item in BOM ? **Yes**

Show Closing Balance ? **Yes**

6. As per the above configuration the QTY of Hp computer is changed to 3, Dell computer should not consider in Bom list and display closing balance as shown as below.

::BOM Selection ::					
No.	Finished Goods	BOM Name	Qty.	Closing	Consider BOM
1	Hp Computer	4 GB RAM	3.00 Nos	20.00 Nos	Yes
2	Dell Computer	4 GB RAM	1.00 Nos	40.00 Nos	No
3	Lenovo Computer	8 GB RAM	1.00 Nos	60.00 Nos	Yes

Accept ?
 Yes or No

7. As per above changes the Bom Details of stock item in sales order is shown below.

Print BOM		
Alpha Automation Pvt Ltd		
Party : Ajanta Printers		
Order No. : 4	Date : 1-4-2024	
Finish Goods	Qty.	Closing Balance
Hp Computer - 4 GB RAM	3.00 Nos	20.00 Nos
Cpu	3.00 Nos	29.00 Nos
Mouse	3.00 Nos	60.00 Nos
Printer	3.00 Nos	20.00 Nos
Keyboard	3.00 Nos	60.00 Nos
Monitor	3.00 Nos	40.00 Nos
64GB Hard Disc	3.00 Nos	30.00 Nos
Lenovo Computer - 8 GB RAM	1.00 Nos	60.00 Nos
Monitor	1.00 Nos	40.00 Nos
Cpu	1.00 Nos	29.00 Nos
Keyboard	1.00 Nos	60.00 Nos
Printer	1.00 Nos	20.00 Nos
Mouse	1.00 Nos	60.00 Nos
256 GB Hard Disc	1.00 Nos	40.00 Nos
Total	4.00 Nos	

9. Print the above BOM Details (Alt+P) as shown below.

Alpha Automation Pvt Ltd		
Party : Ajanita Printers		
Order No. : 4	Date : 1-4-2024	
Particulars	Qty.	Closing Balance
Hp Computer - 4 GB RAM	3.00 Nos	20.00 Nos
Cpu	3.00 Nos	29.00 Nos
Mouse	3.00 Nos	60.00 Nos
Printer	3.00 Nos	20.00 Nos
Keyboard	3.00 Nos	60.00 Nos
Monitor	3.00 Nos	40.00 Nos
64GB Hard Disc	3.00 Nos	30.00 Nos
Lenovo Computer - 8 GB RAM	1.00 Nos	60.00 Nos
Monitor	1.00 Nos	40.00 Nos
Cpu	1.00 Nos	29.00 Nos
Keyboard	1.00 Nos	60.00 Nos
Printer	1.00 Nos	20.00 Nos
Mouse	1.00 Nos	60.00 Nos
256 GB Hard Disc	1.00 Nos	40.00 Nos
Total	4.00 Nos	

PgUp PgDn PgRight » PgLeft « Home End Zoom
 Page: 1 of 1 In Inches Print Mail Esc

FAQ

Which version/release of Tally Prime does the add-on support?

This add-on will work only from Tally Prime Release 1.0 onwards.

How will I get support for this add-on?

For any functional support requirements please do write to us on mail@aaplautomation.com or call us at +91-288-2713956/57/58, +91-9023726215/16/17/18, 9099908115, 9825036442.

If I need some enhancements / changes to be incorporated for the add-on, whom should I contact?

Please to write to us on mail@aaplautomation.com with your additional requirements and we will revert to you in 24 hours.

Will new features added be available to us?

We offer one year availability of all support and new features free of cost. After one year, nominal subscription cost will be applicable to you to continue to get free support and updates.

What will happen after one year?

There is no fixed annual charge to be payable mandatory. However if any changes are required in our Add-On to make compatible with New Release of Tally Prime then the modification Charges will be applied.

I am using a multi-site. Can I use the same Add-on for all the sites?

No, one Add-on will work only for 1 site. You need to purchase again if you want to use the same Add-on for more sites.

TDL Management screen shows errors with the Add-on. What do I do?

Check whether the error is because of the Add-on or because of clashes between 2 TDLs (An add-on is also a TDL). In case of clashes, disable one or more TDLs and check which

TDL has the error. If the Add-on has a problem, you can report it to us.

My Tally went into educational mode after installing the add-on. What do I do?

Go into **Gateway of Tally** → **Press F1 (Help)** → **TDL & Add-on** → **Press F4 and** remove the Add-on from the list and Restart Tally.